



MAVERICK

FIREBUG TECHNOLOGY

Maverick the versatile robust Light Portable Pump (LPP) offering portable or fixed, effective low volume water mist or conventional high volume water flow.



CONTACT
(+971) 434 53452



WEBSITE
FIREBUGGROUP.COM



EMAIL
INFO@FIREBUGGROUP.COM



- Self-priming high volume portable pump with advanced ergonomic design
- Remote controlled – giving easy use – the operator can control the water supply whilst being away from the pump
- Can be installed via skid system onto a range of vehicle promoting efficient ways of working
- Can work from a pressure fed supply, open water supply and/or tank fed supply
- Twin outlet manifold with instantaneous couplings capable of delivering up to 400 LPM

FEATURES & BENEFITS

APPLICATIONS

- Firefighting
- Flood Defence
- Mining
- Marine
- Oil/Gas Industries
- Industry/Commercial



The self priming, petrol driven, remote controlled Maverick Light Portable high volume Pump is designed as a multi purpose Fire Fighting Pump either portable or permanently mounted to a vehicle or skid. It has the capability of running a 19mm Hose Reel or 1.5" Layflat Hose from either a tank, lifting water from an open water source via a hard suction or operating from a pressure fed supply from a hydrant or floating pump

1. Portable or permanently mounted.



Skid mounted



Vehicle mounted



Portable



2.

19mm hose reel

layflat




Water Supply Options



Open Water source

OR



Tank

OR



Pressure fed
Hydrant or floating pump

SPECIFICATION



Engine

Type:	4-stroke
Cylinders:	Single-Cylinder
Engine type:	Honda GX390
Authorised output:	10.3Kw (14ps)
Fuel type:	No. 93 or No. above 93 unlead Gasoline
Fuel tank:	6.5L
Consumption:	3.5L/H
Fuel System:	Carburetor-manual choke
Lubrication:	Splash lubrication
Lubrication oil type:	SAE 10w-30 (Grade: SF\SG)
Oil Capacity:	0.9L
Start way:	Recoil, Electric
Method of ignition:	DCI

Priming water

Priming type:	Exhaust (Option: Vacuum Pump)
Max Suction depth:	7M
Priming time:	≤ 35 S

Pump

Type Single stage:	Suction Dia 2.5" (65mm)
Suction thread:	WOQIW/ WOQ Screw type
Outlet Dia:	1.5" (40mm)
Outlet thread:	Screw type
Outlet quantity:	2
Outlet valve type:	Ball valve

Performance


Pump lift:	7M
Rate Flow:	220L/min
Rate Pressure:	1.0Mpa

Dry Weight

KG:	67
-----	----

Size:	610 x 560 x 610
-------	-----------------

- 60gpm (220L/min) @ 145PSI (10Bar)
- 105gpm (400L/min) @ 116PSI (8bar)
- 130gpm (500L/min) @ 87 PSI (6bar)

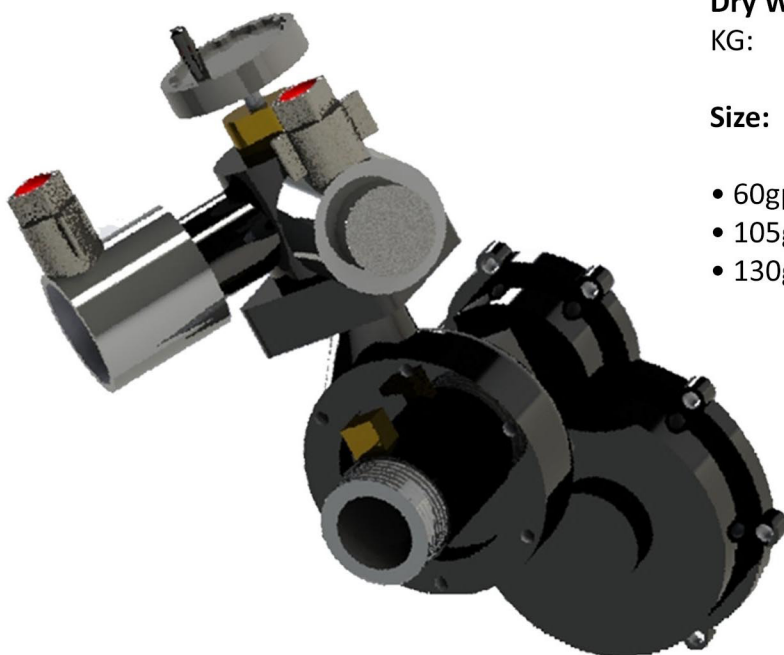



**STAY
UP-TO-DATE
WITH US ON SOCIAL MEDIA**



Firebuggroup



Firebuggroup



Firebuggroup



Sales@Firebuggroup.com



Firebuggroup



Firebuggroup



Firebuggroup

**VISIT @ FIREBUGGROUP.COM
INFO@FIREBUGGROUP.COM**

FireBug™

U.A.E. OFFICE

UAE Office: Info@firebuggroup.com AWZ Building Warehouse 4, Ras Al Khor Industrial Area No.2. PO Box 252234 Dubai, U.A.E.
Tel: +971 434 53452

FB FIRE TECHNOLOGIES LTD.

UK Office: Matrix@Dinnington Business Centre, Nobel Way Dinnington, Sheffield S25 3QB, United Kingdom Tel: +44 1909 547070
Fax: +44 8453 884115

FireBug™